



GLOBAL LEADING TECHNOLOGY  
FROM FIRST-CLASS QUALITY








## BASKET STRAINER

NOMINAL DIAMETER DN (mm)      DIMENSIONS (mm)      PIPE PLUG

|     | H1    | H    | L    |         |
|-----|-------|------|------|---------|
| 25  | 160   | 260  | 180  | R3/4"   |
| 32  | 170   | 270  | 200  | R3/4"   |
| 40  | 170   | 300  | 260  | R3/4"   |
| 50  | 170   | 300  | 260  | R3/4"   |
| 65  | 210   | 360  | 330  | R3/4"   |
| 80  | 250   | 400  | 340  | R3/4"   |
| 100 | 30    | 470  | 400  | R3/4"   |
| 125 | 360   | 550  | 480  | R3/4"   |
| 150 | 420   | 630  | 500  | R3/4"   |
| 20  | 530   | 780  | 560  | R3/4"   |
| 250 | 640   | 930  | 660  | M20×1.5 |
| 300 | 840   | 1200 | 750  | M20×1.5 |
| 400 | 920   | 1400 | 850  | M20×2.0 |
| 500 | 1050  | 1500 | 1000 | M20×2.0 |
| 600 | 140   | 2000 | 1380 | M20×2.0 |
| 800 | 16400 | 2300 | 1500 |         |

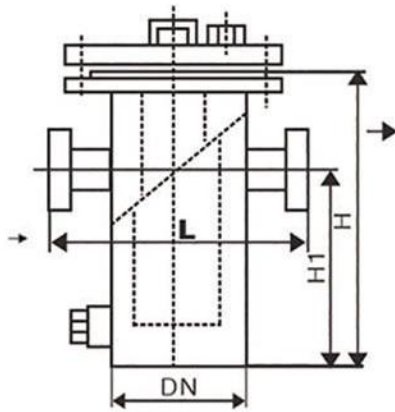

## MULTI FILTER

### FEATURES

The tandem type is a manifestation of hierarchical filtering, which is composed of units with different precisions. The purpose of the parallel type is to increase the filtering area of a single unit or to serve as a backup switching function. The combination of two or more units meets the continuous and uninterrupted production requirements.

The mobile type is mainly a performance of a multi-purpose machine, and its combination is generally equipped with a filter unit, a pump, and a trolley.

It can be combined according to customer requirements and is a personalized customized product.

### MAIN DIMENSIONS

| DN  | D   | L    | L1  | H1   | H2  |
|-----|-----|------|-----|------|-----|
| 50  | 273 | 1250 | 380 | 1200 | 460 |
| 65  | 325 | 1280 | 400 | 1200 | 475 |
| 80  | 377 | 1400 | 420 | 1440 | 515 |
| 100 | 425 | 1570 | 480 | 1480 | 540 |
| 150 | 520 | 1880 | 580 | 1780 | 610 |
| 200 | 566 | 2100 | 650 | 1880 | 680 |

### MAIN COMPONENT MATERIAL

|                                       | CARBON STEEL                                   | STAINLESS STEEL |
|---------------------------------------|--|-----------------|
| FILTER FRAME AND FILTER MESH MATERIAL |  | Stainless steel |
| SEAL MATERIAL                         | Oil-resistant asbestos, nitrile rubber, teflon |                 |
| OPERATING TEMPERATURE (°C)            | -40-380  | -80-450         |
| NOMINAL PRESSURE (MPa)                | 0.6-5.0 ( 150LB-600LB)                         |                 |
| FILTRATION PRECISION (MESH/in)        | 10-300   |                 |

